


MECHANICALLY ATTACHED GENFLEX FRM EPDM OVER GENFLEX ISO 22 ga, 33 KSI, STEEL DECK (MAX SPAN 72")

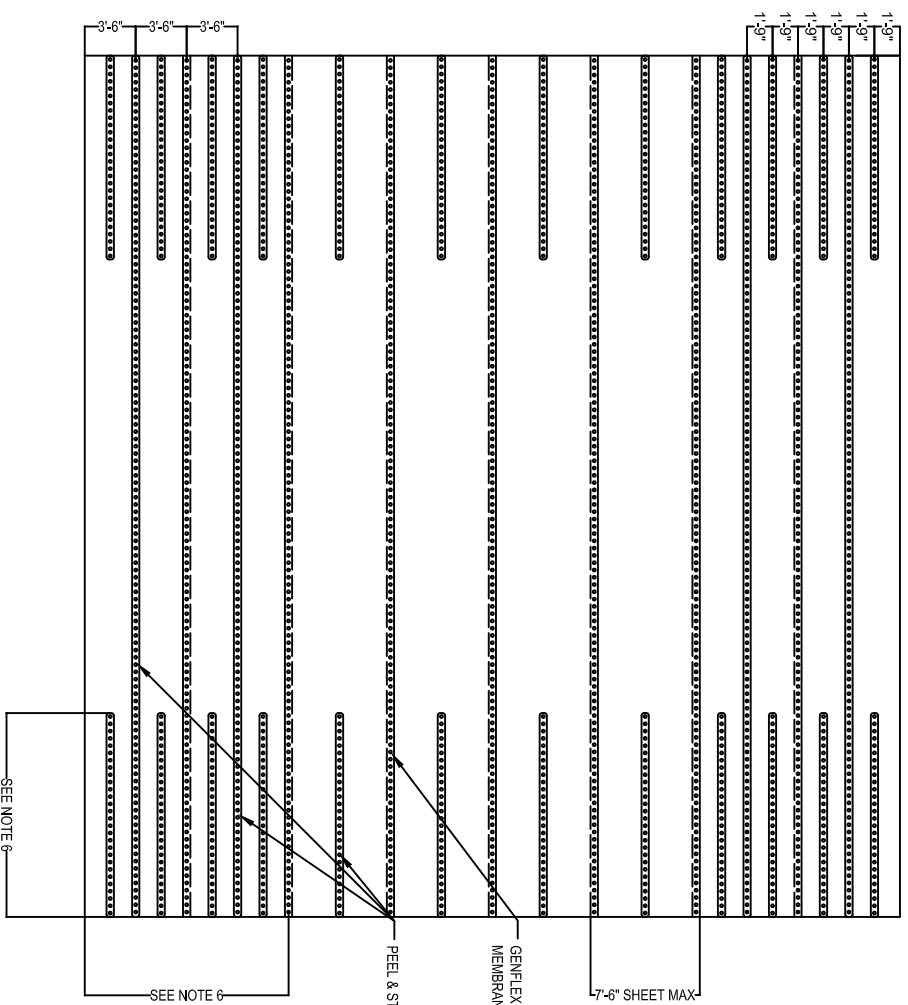

- NOTES:
1. INSTALL FASTENER ROWS AND OR BATTEN BARS PERPENDICULAR TO THE ROOF DECK RBBS. PLEASE REFER TO SECTION 2.2.7.3.2 IN FM 1-29 REGARDING MECHANICALLY ATTACHED SINGLEPLY MEMBRANES AND MULTIPLY COVERS WITH MECHANICALLY ATTACHED BASE PILES.
 2. PLEASE REFER TO FM 1-29 FOR SPECIFIC ATTACHMENTS. DECKS MUST BE ATTACHED PER FACTORY MUTUAL TO OBTAIN A FACTORY MUTUAL RATING.
 3. IF THE PROJECT IS FACTORY MUTUAL INSURED, PLEASE CONTACT THE LOCAL FACTORY MUTUAL REPRESENTATIVE.
 4. IN HURRICANE PRONE AREAS, FACTORY MUTUAL RECOMMENDS USING A MIN. .080" THICK MEMBRANE.
 5. PLEASE VISIT THE GENFLEX WEBSITE AT [HTTP://GENFLEX.COM](http://genflex.com) FOR ADDITIONAL INFORMATION.
 6. PLEASE REFER TO FM 1-28 FOR PERIMETER AND CORNER ENHANCEMENT REQUIREMENTS. THE PERIMETER AND CORNER ZONES ARE CALCULATED BY USING 1 TIMES THE LESSER PLAN DIMENSION OR 4 TIMES THE BUILDING HEIGHT, AND NEVER LESS THAN 3' (914 mm), (4' (1267 mm) PERIMETER SHOWN FOR EXAMPLE ONLY. ACTUAL PERIMETER AND CORNER ZONES MUST BE CALCULATED ON A JOB TO JOB BASIS.)

GENFLEX HEAVY DUTY FASTENER WITH GENFLEX COILED BAR ANCHOR FASTENED AT 6" (152 mm) o.c.
MEMBRANE SEAMS 6" (152 mm) WIDE USING PEEL & STICK SEAM TAPE CENTERED OVER THE FASTENER.
PEEL & STICK COVER TAPE MIN. 6" (152 mm) ON TOP OF MEMBRANE.

SEE NOTE 6



GENFLEX FRM EPDM 84" ROW SPACING AT 6" O.C.

GENFLEX FRM™

ACCEPTABLE SYSTEMS:
MAS

FM Layout

ISSUE / REVISION
DATE:
4/16/2015

NOT TO SCALE

FM 1-75