



Metalwork by others, fabricated and installed to SMACNA standards (minimum fastening requirements shown below), must be installed in conjunction with a continuous metal cleat, securing fascia tightly to face of building in order to prevent or mitigate potential wind damage.

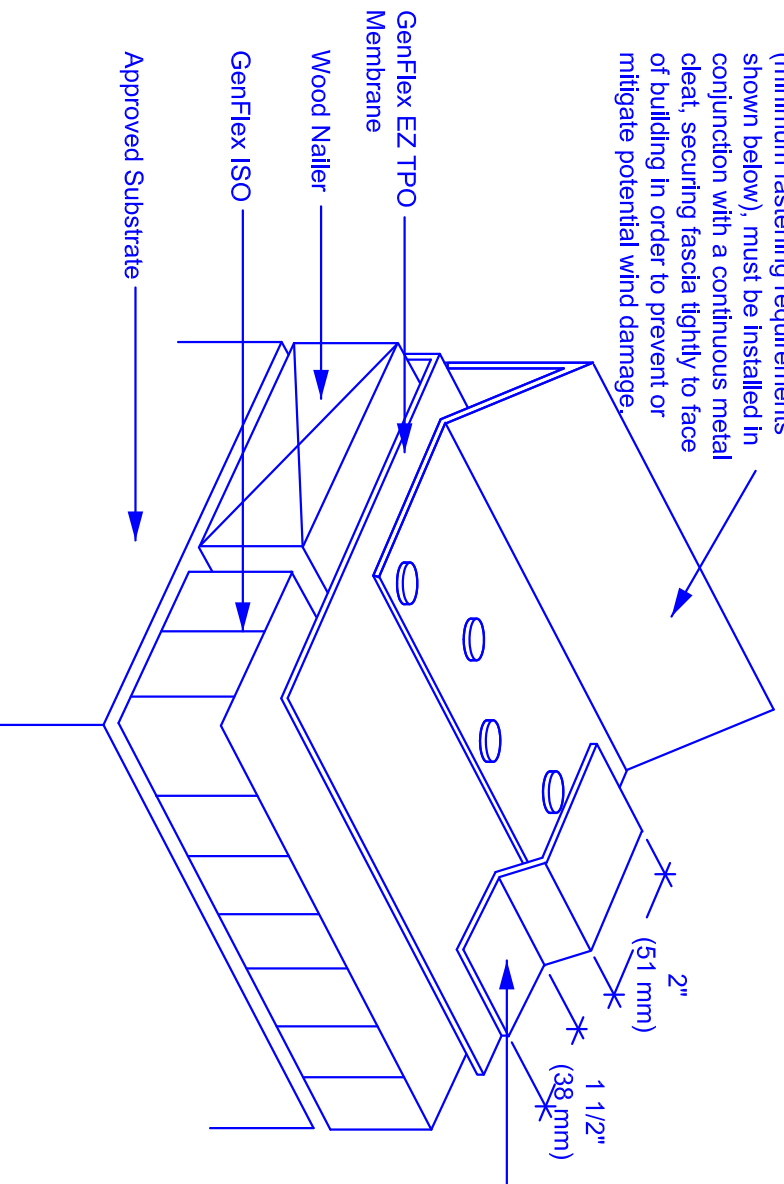

GenFlex Flashing Material (Cover Tape Set in Primer or TPO Flashing Welded to TPO Coated Metal)

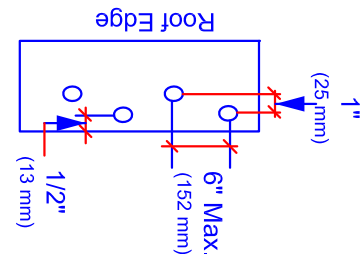

Gravel Stop/Drip Edge Securement Pattern

EZ TPO Systems

ACCEPTABLE SYSTEMS:
TPO Systems

MAXIMUM WARRANTY: **20 Years**

ISSUE / REVISION
DATE:
10-27-2015

DETAIL NO.
EZ-14.12

NOT TO SCALE