



**Standard Ballasted Assembly**

Minimum 10 lb/ft<sup>2</sup> (48.8 kg/m<sup>2</sup>) of Approved Ballast

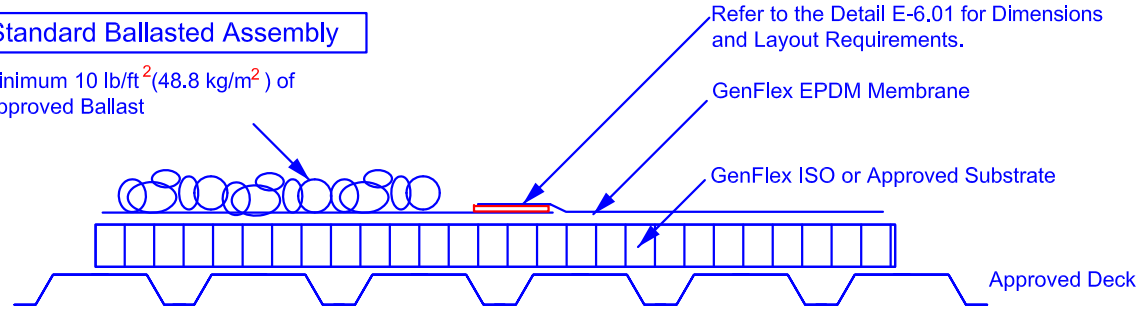


**IRMA Assembly**

Minimum 10 lb/ft<sup>2</sup> (48.8 kg/m<sup>2</sup>) of Approved Ballast

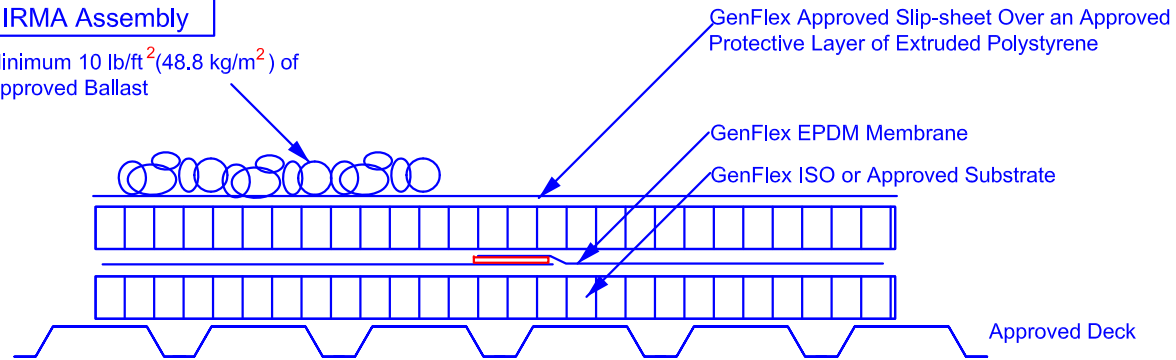

**Paver Ballasted Assembly**

Minimum 10 lb/ft<sup>2</sup> (48.8 kg/m<sup>2</sup>) of Approved Ballast

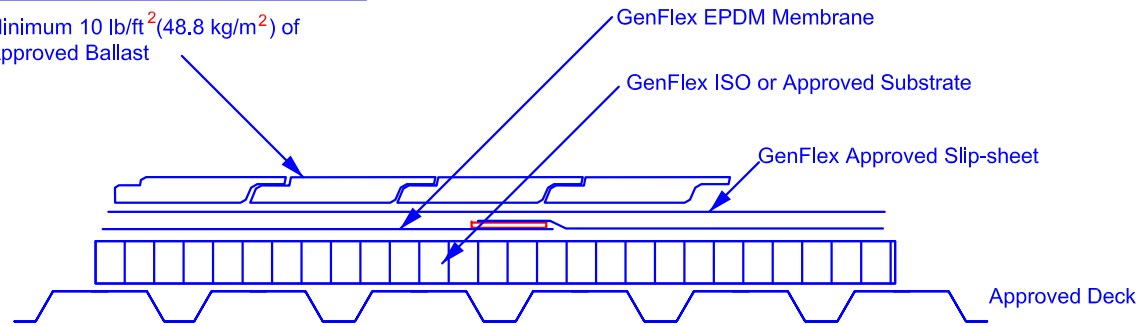

NOTE: Position insulation with board ends resting on the top flutes.



**Ballasted System Insulation Cross Section**

EPDM Systems

ACCEPTABLE SYSTEMS:  
Ballast Systems Only

MAXIMUM WARRANTY: **20 Years**

ISSUE / REVISION  
DATE:  
6-22-2015

NOT TO SCALE

DETAIL NO.

**E-1.03-4-5**