


GenFlex Bar Anchor Secured with GenFlex
Fasteners Spaced According to the
Mechanically Attached TPO Code Matrix



Position insulation and membrane sheets to enable securement into the top flutes on steel decks to ensure positive attachment and to reduce fastener movement. Insulation should be installed with board ends resting on the flute tops.

Refer to Detail T-6.03 for seam specifications.

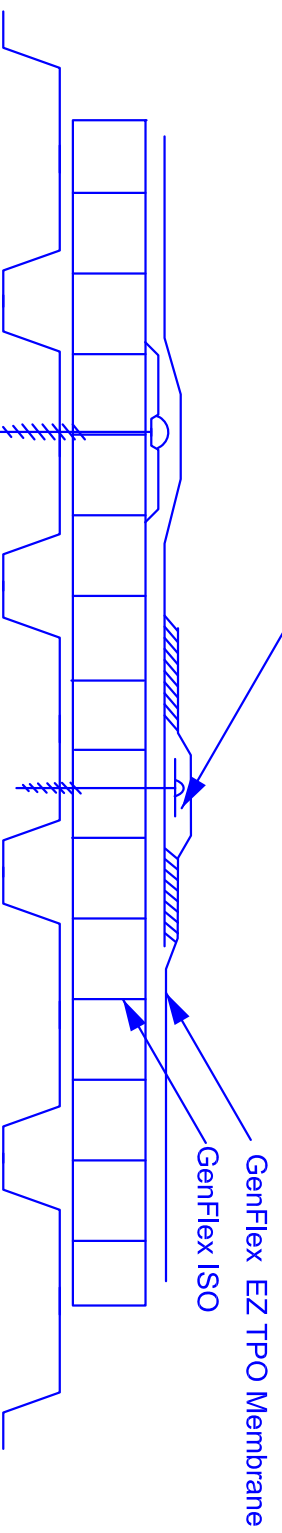

Dual Weld Seam Insulation Cross Section

EZ TPO Systems

ACCEPTABLE SYSTEMS:
Mechanically Attached Systems

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:
6-18-2015

DETAIL NO.
EZ-S-42.02DW

NOT TO SCALE