

Standard Gravel Stop

ACCEPTABLE SYSTEMS:
Fully Adhered & M.A.S.

MAXIMUM WARRANTY: **20 Years**

ISSUE / REVISION
DATE:


10-27-2015

DETAIL NO.

EZ-14.03

On Adhered or Mechanically Attached Systems, Dam is Optional.
On Ballasted Systems, Dam Height Must Be at Least 2" (51 mm) High.
If a Dam Is Fabricated into the Gravel Stop Metal, Refer to Detail T-10.03 for Drainage Scupper Fabrication.

TPO Cover Tape - Must Achieve 2" Min. (51 mm) Splice onto Metal Flange Beyond Fasteners

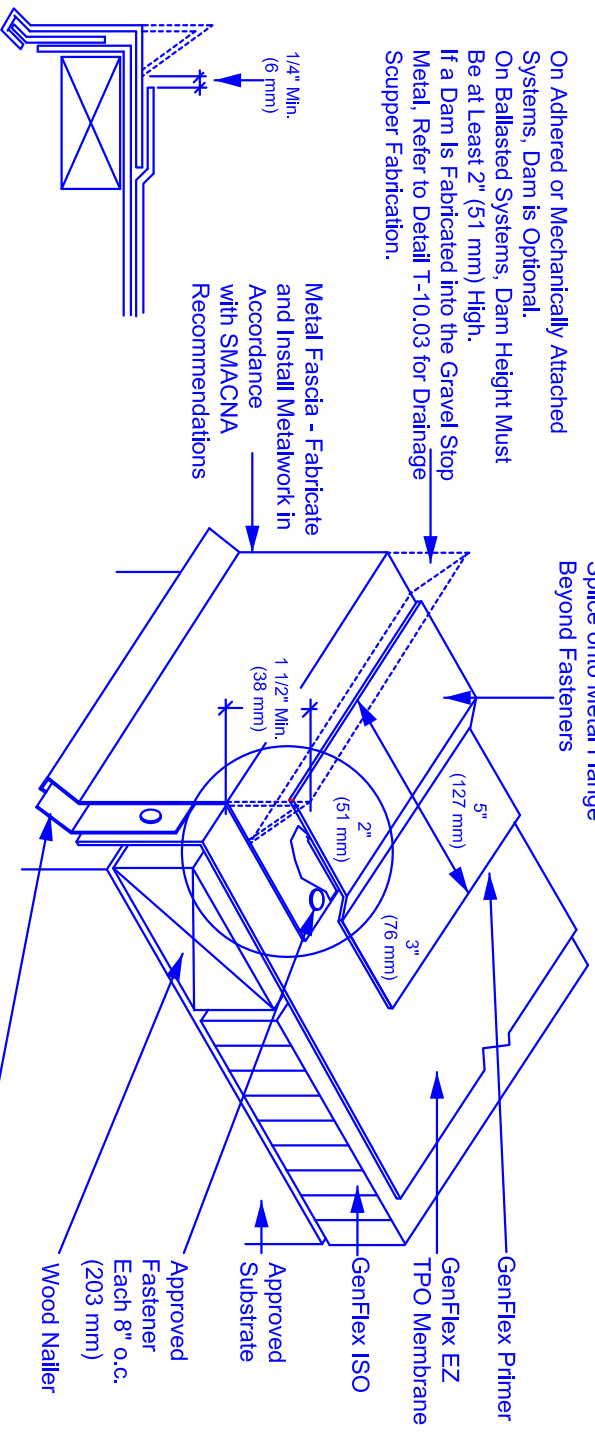

NOTE: Edge Caulk is required only on the dam side of strip-in on Bar Cover Tape applications. Both sides of FlexFlash E require Edge Caulk.

Apply GenFlex Edge Caulk at metal joints, cover tape end laps and T-joint intersections with field splices in deck sheet. See Details T-6.06 and T-14.05.