


**Peel & Stick™ Inside Corner**

ACCEPTABLE SYSTEMS:  
Self Adhered

ISSUE / REVISION  
DATE:  
10-26-2015

DETAIL NO.  
**EZ-S-5.02**

**MAXIMUM WARRANTY: 20 Years**

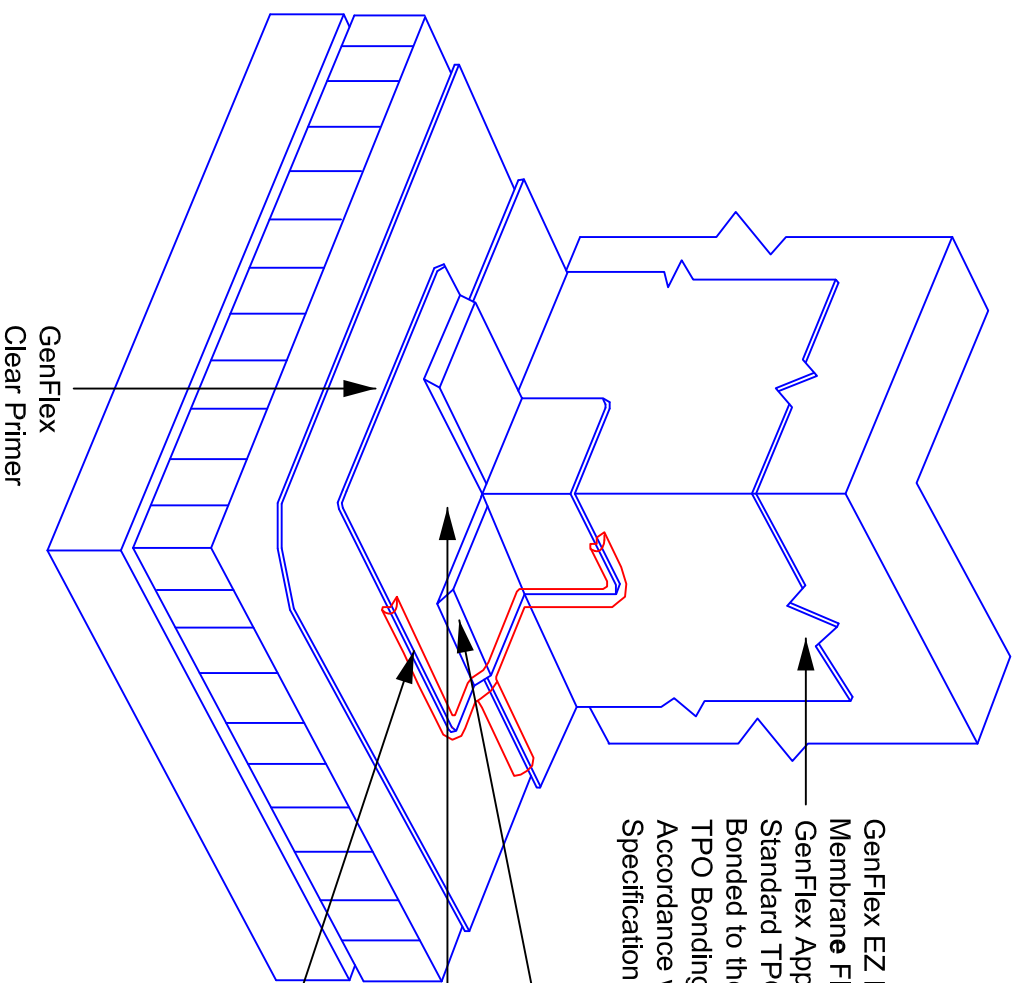

GenFlex EZ Peel & Stick Membrane Flashing Bonded to a GenFlex Approved Substrate or Standard TPO Membrane Bonded to the Substrate with TPO Bonding Adhesive in Accordance with GenFlex Specification

TPO Flashing Kit Material

After inspection, coat the Outside Corner Flashing with GenFlex Ace Coating in order to match the installed system color.

GenFlex White EZ TPO Edge Caulk - Apply around corner flashing and on all "HW" seams assembled with 3" White Seam Tape and "SA" seams.

Refer to detail PS-6.01 for seaming options.