


Product Data Sheet

FLEXWHITE™ PEEL & STICK™ EPDM T-JOINT COVER



Description

The GenFlex FlexWhite™ Peel & Stick™ EPDM T-Joint Cover is a 5.75" (146 mm) round uncured EPDM flashing laminated to a cured tape. A second 3" (76.2 mm) diameter layer of uncured tape designed to flow is applied at the center. The joint cover conforms to irregular surfaces such as encountered at "T" joints readily providing an excellent seal to both FlexWhite EPDM and TPO roofing systems.

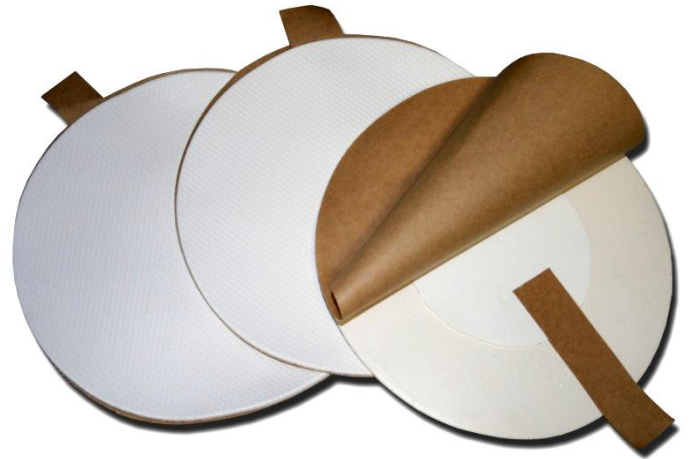

Physical Properties

FLASHING	TYPICAL VALUES
Color	White
Base	Semi-cured flashing
Thickness	0.060" ± 0.005" (1.5 mm ± 0.13 mm)
Size	5.75" ± .125" diameter (146 mm ± 3.17 mm)

TAPE PROPERTY	TYPICAL VALUES
Color	White
Base	Rubber Polymers
Solids	100%
Cure State	Cured
Thickness	
Seam Tape: 3" (76.2 mm)	0.030" ± 0.005" (0.77 mm ± 0.13 mm)
Center Layer	0.037" ± 0.005" (0.94 mm ± 0.13 mm)

Installation

Refer to current GenFlex Technical Specifications for additional application instructions.

IMPORTANT: Ensure both mating surfaces are free of debris and no moisture is present on the splicing surfaces.

1. Thoroughly mix GenFlex FlexWhite Clear Primer. DO NOT THIN! A minimum of 2 minutes of vigorous hand mixing with a wooden paint stirrer or its equivalent is required. All sources of ignition should be eliminated; adequate ventilation should exist.
2. With a scrub pad and handle, apply GenFlex FlexWhite Clear Primer to the seam intersection or T-joint area using long and continuous back and forth strokes with heavy to moderate pressure along the bonding area until no streaks or puddling occurs.
3. Allow FlexWhite Clear Primer to dry until slightly tacky to a dry finger touch.
4. Remove the release paper from the joint cover, taking care not to touch the outside edges of the joint cover.
5. Fold the joint cover in half, EPDM side up and position the center of the joint cover over the target point. Mate the joint cover to the prepared surface starting from the center and then in all directions. Ensure good contact by brushing your hand across the top.
6. With a Teflon coated or hard rubber roller, hand-roll the entire FlexWhite Peel & Stick T-Joint Cover from the center outward, working the joint cover into the step-off or irregularity.
7. Apply a continuous "high profile" bead of FlexWhite Edge Caulk to the entire edge of the T-Joint per current specifications.

Product Data

Product Data Sheet

FLEXWHITE™ PEEL & STICK™ EPDM T-JOINT COVER



SIZE	QUANTITY	PRODUCT #
5.75" (146 mm)	25 per Carton; 60 Cartons per Pallet	W590030099

LEED Information

Recycled Content

Post Consumer	0%
Post Industrial	0%

Storage

Store indoors in original unopened containers at a temperature between 60 °F and 80 °F (16 °C and 27 °C) for maximum shelf life. Do not store on roof in direct sunlight. When exposed to lower temperatures, restore to room temperature prior to use.

Shelf Life

6 months; shelf life will be shortened if exposed to elevated temperatures.

Precautionary Data

Take care when moving, transporting, and handling, etc., to avoid sources of punctures and physical damage.

Contact GenFlex Roofing Systems Technical Department for specific recommendations.

Refer to Material Safety Data Sheet for additional information.