

Product Data Sheet

GENFAST™ ACCUTRAC INSULATION PLATE




Description

GenFast™ AccuTrac Insulation Plates are 3" (76.2 mm) square metal insulation plates for use with the OMG AccuTrac Insulation Fastener Tool.

GenFast AccuTrac Insulation Plates are manufactured to conform to the physical property requirements of Factory Mutual Specification #4470.

GenFast AccuTrac plates may be used in any GenFlex system for attachment of roofing insulations to steel, wood, and lightweight concrete (into steel deck) substrates.

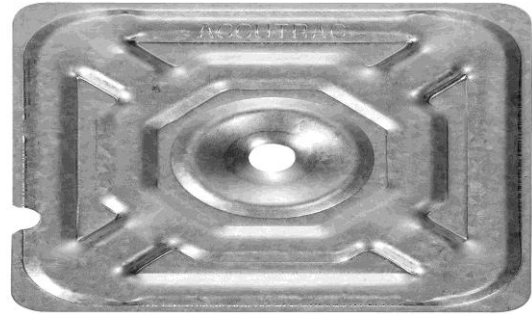

Physical Properties

PROPERTIES	MINIMUM PERFORMANCE
Metal	Galvalume®
Plate Shape	3" (76 mm) square
Material Thickness	0.018" to 0.021" (.45 mm to .53 mm)
Corrosion Coating	AZ-55

Method of Application

1. GenFast Fastener length is determined as follows:
 - Steel Deck – Minimum of 1" (25 mm) required penetration
 - Wood Deck – Minimum of 1" (25 mm) required penetration
2. Check current GenFlex specifications for exceptions and/or changes.

Product Data

PACKAGING	QUANTITY	ITEM #
Bucket	500 Pieces	51236

Storage

Fasteners should be protected from moisture and kept dry at all times.

If stored out of doors, place on skids in a dry area and cover with a breathable tarp.

Precautions

Eye protection is recommended when installing fasteners and plates.

Refer to Material Safety Data Sheet for further information.

Compliance

Recycled Content

Post Consumer	0%
Post Industrial	0%

Please contact the GenFlex Technical Department at 800-443-4272.